


ERTELALSOP

THE FIRST NAME IN LIQUID FILTRATION

8S

These 8-inch square (20 cm square) plate and frame filters are one of the most economical models ErtelAlsop manufactures. Bench top or cart mounted, these filters are able to accept up to twenty (20) filter pads, and they are designed to work in a wide range of high efficiency, ultra-fine filtration applications.

As with all ErtelAlsop plate and frame filter presses, the Model 8S has the same component flexibility as other models, accepts various thickness filter media, and is internally ported eliminating the need for gaskets as well as concerns about compatibility and cross-contamination.

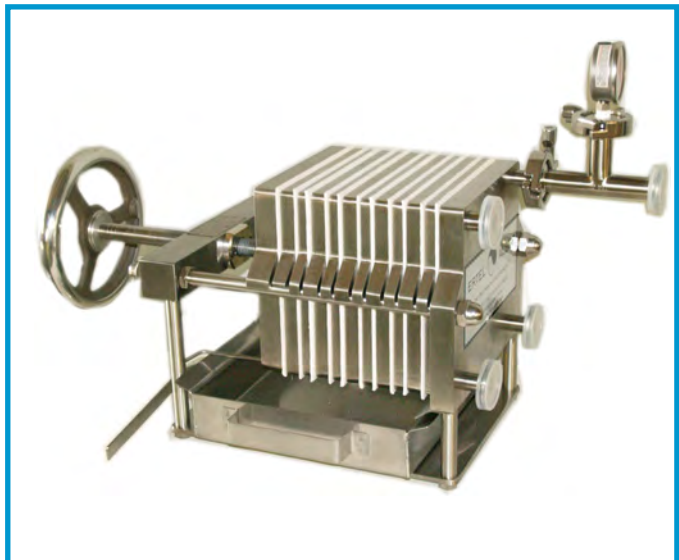

STANDARD FEATURES

- 316L SS
- BioClean™ Outlet Plates
- Internal Ports
- 3/4 inch Tri-Clamp Fittings
- Hand Hydraulic Closure
- Bench Top Mounted

OPTIONAL FEATURES

- Twenty (20) pad capacity expansion
- Variable Inlet Frame Thickness
- Polypropylene Plates and Frames
- Dividing Heads
- Weld-Free Plate Design
- Thorough Wash Capability
- Cart-Mounted
- Pressure Gauge
- Tubing
- Pump
- Motor

APPLICATIONS:

- Small Batch Cosmetics
- Wine Production
- Distilled Beverages
- Cough Syrups
- Flavors
- Fragrances
- Small Volume Parenterals

PRODUCT TESTING

Product testing is always available either at your facility, through our network of distributors, or at our in-house laboratory.

PILOT TESTING - RENTALS

For in-plant testing and scale-up procedures, ErtelAlsop offers a variety of lab filters for rent. A portion of rental fees can be applied to the purchase of your full production filter.

FILTER MEDIA


As with all ErtelAlsop plate and frame filter press models, media is available for any application and/or operating condition, and is chosen based on your specific operating conditions, the performance required by the filtering media, and criteria given to us by you and/or by sample processing we do in our lab.

ErtelAlsop offers the widest varieties of filter media including 100% cellulose pads, cellulose and diatomaceous earth pads, cellulose and Celpure® diatomaceous earth pads, cellulose and perlite pads, and cellulose and activated carbon pads.

All filter pads are manufactured to very high standards for a wide range of applications in the pharmaceutical, chemical, cosmetic, electric utility and food and beverage markets. ErtelAlsop also offers a Validation Guide to assist in the validation of its filter pads in your process. The Validation Guide contains information regarding raw materials, extractables, and general information about the product. The combination of ErtelAlsop "P" grade filter pads and ErtelAlsop's BioClean™ plate and frame filter press design, can help to simplify your depth filtration validation now more than ever.

8S SPECIFICATIONS

Standard Height	13.8 in	(0.35 m)
Standard Width	11.75 in	(0.3 m)
Range of Length	15.8 - 49.2 in	(0.4 - 1.25 m)
Plate Dimension	8 in square	(203 mm)
Ports	4 internal	
Area/Filter Sheet	0.31 ft ²	(0.029 m ²)
Cake Vol. - 12.5 mm inlet	0.07 gal	(0.25 l)
Cake Vol. - 25 mm inlet	0.18 gal	(0.68 l)
Cake Vol. - 37.5 mm inlet	0.27 gal	(1.02 l)
Cake Vol. - 50 mm inlet	0.36 gal	(1.36 l)
Batch Size	Up to 26.4 gal	(100 l)
Flow Rate	Up to 20 gpm	(74 lpm)



For additional
product information visit
ErtelAlsop.com

[Technical Bulletin 8S-PF-11](#)

ErtelAlsop
PO Box 3358
Kingston, NY 12402 US

ErtelAlsop.com
800.553.7835 Telephone
845.339.1063 Fax

Keep in touch.
Join our Newsletter to learn
about the latest filter best
practices and more!

Visit us at [ErtelAlsop.com](#)

Your Local Distributor

